MacArthur Elementary
MARK # 8
BASIC BUILDING
ARCHITECT J. CYR & ASSOC.
DATE 4-5-65
JOB # 6421

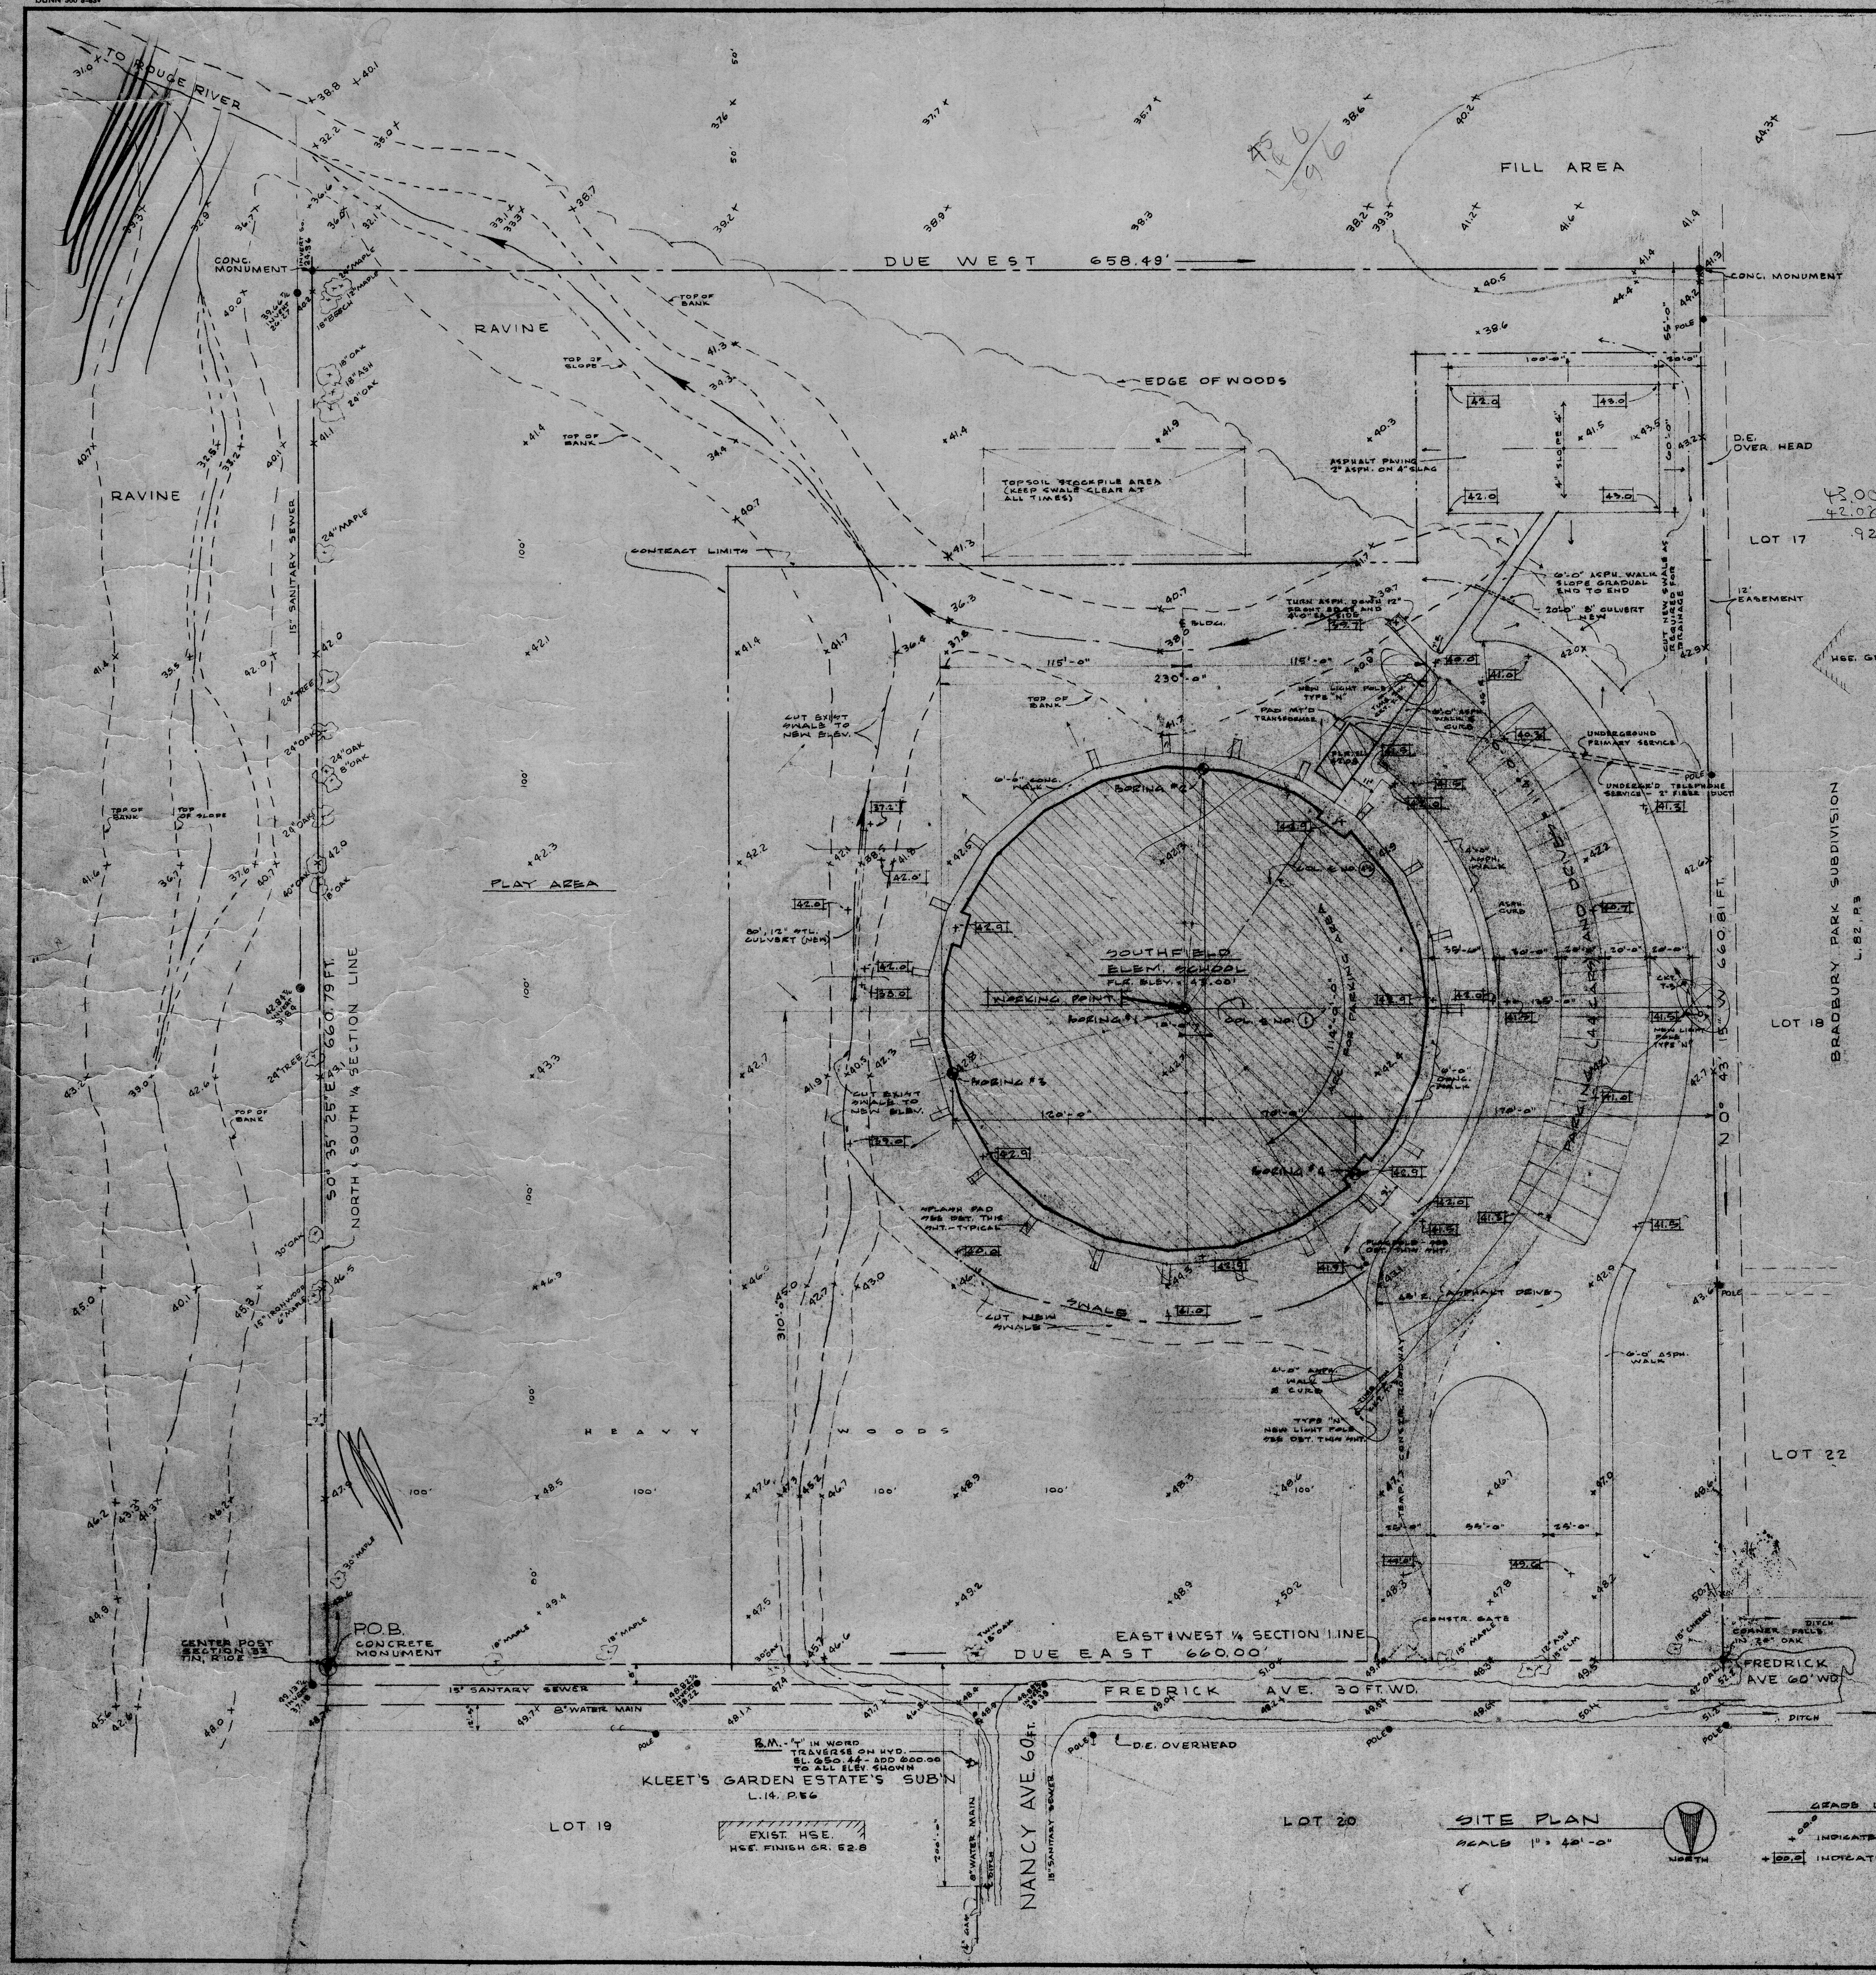

SITE PLAN
SCALE 1" = 40'-0"

GRADE LEGEND
+ 00.0 INDICATES APPROX. EXIST. GRADES
+ [00.0] INDICATES NEW GRADES

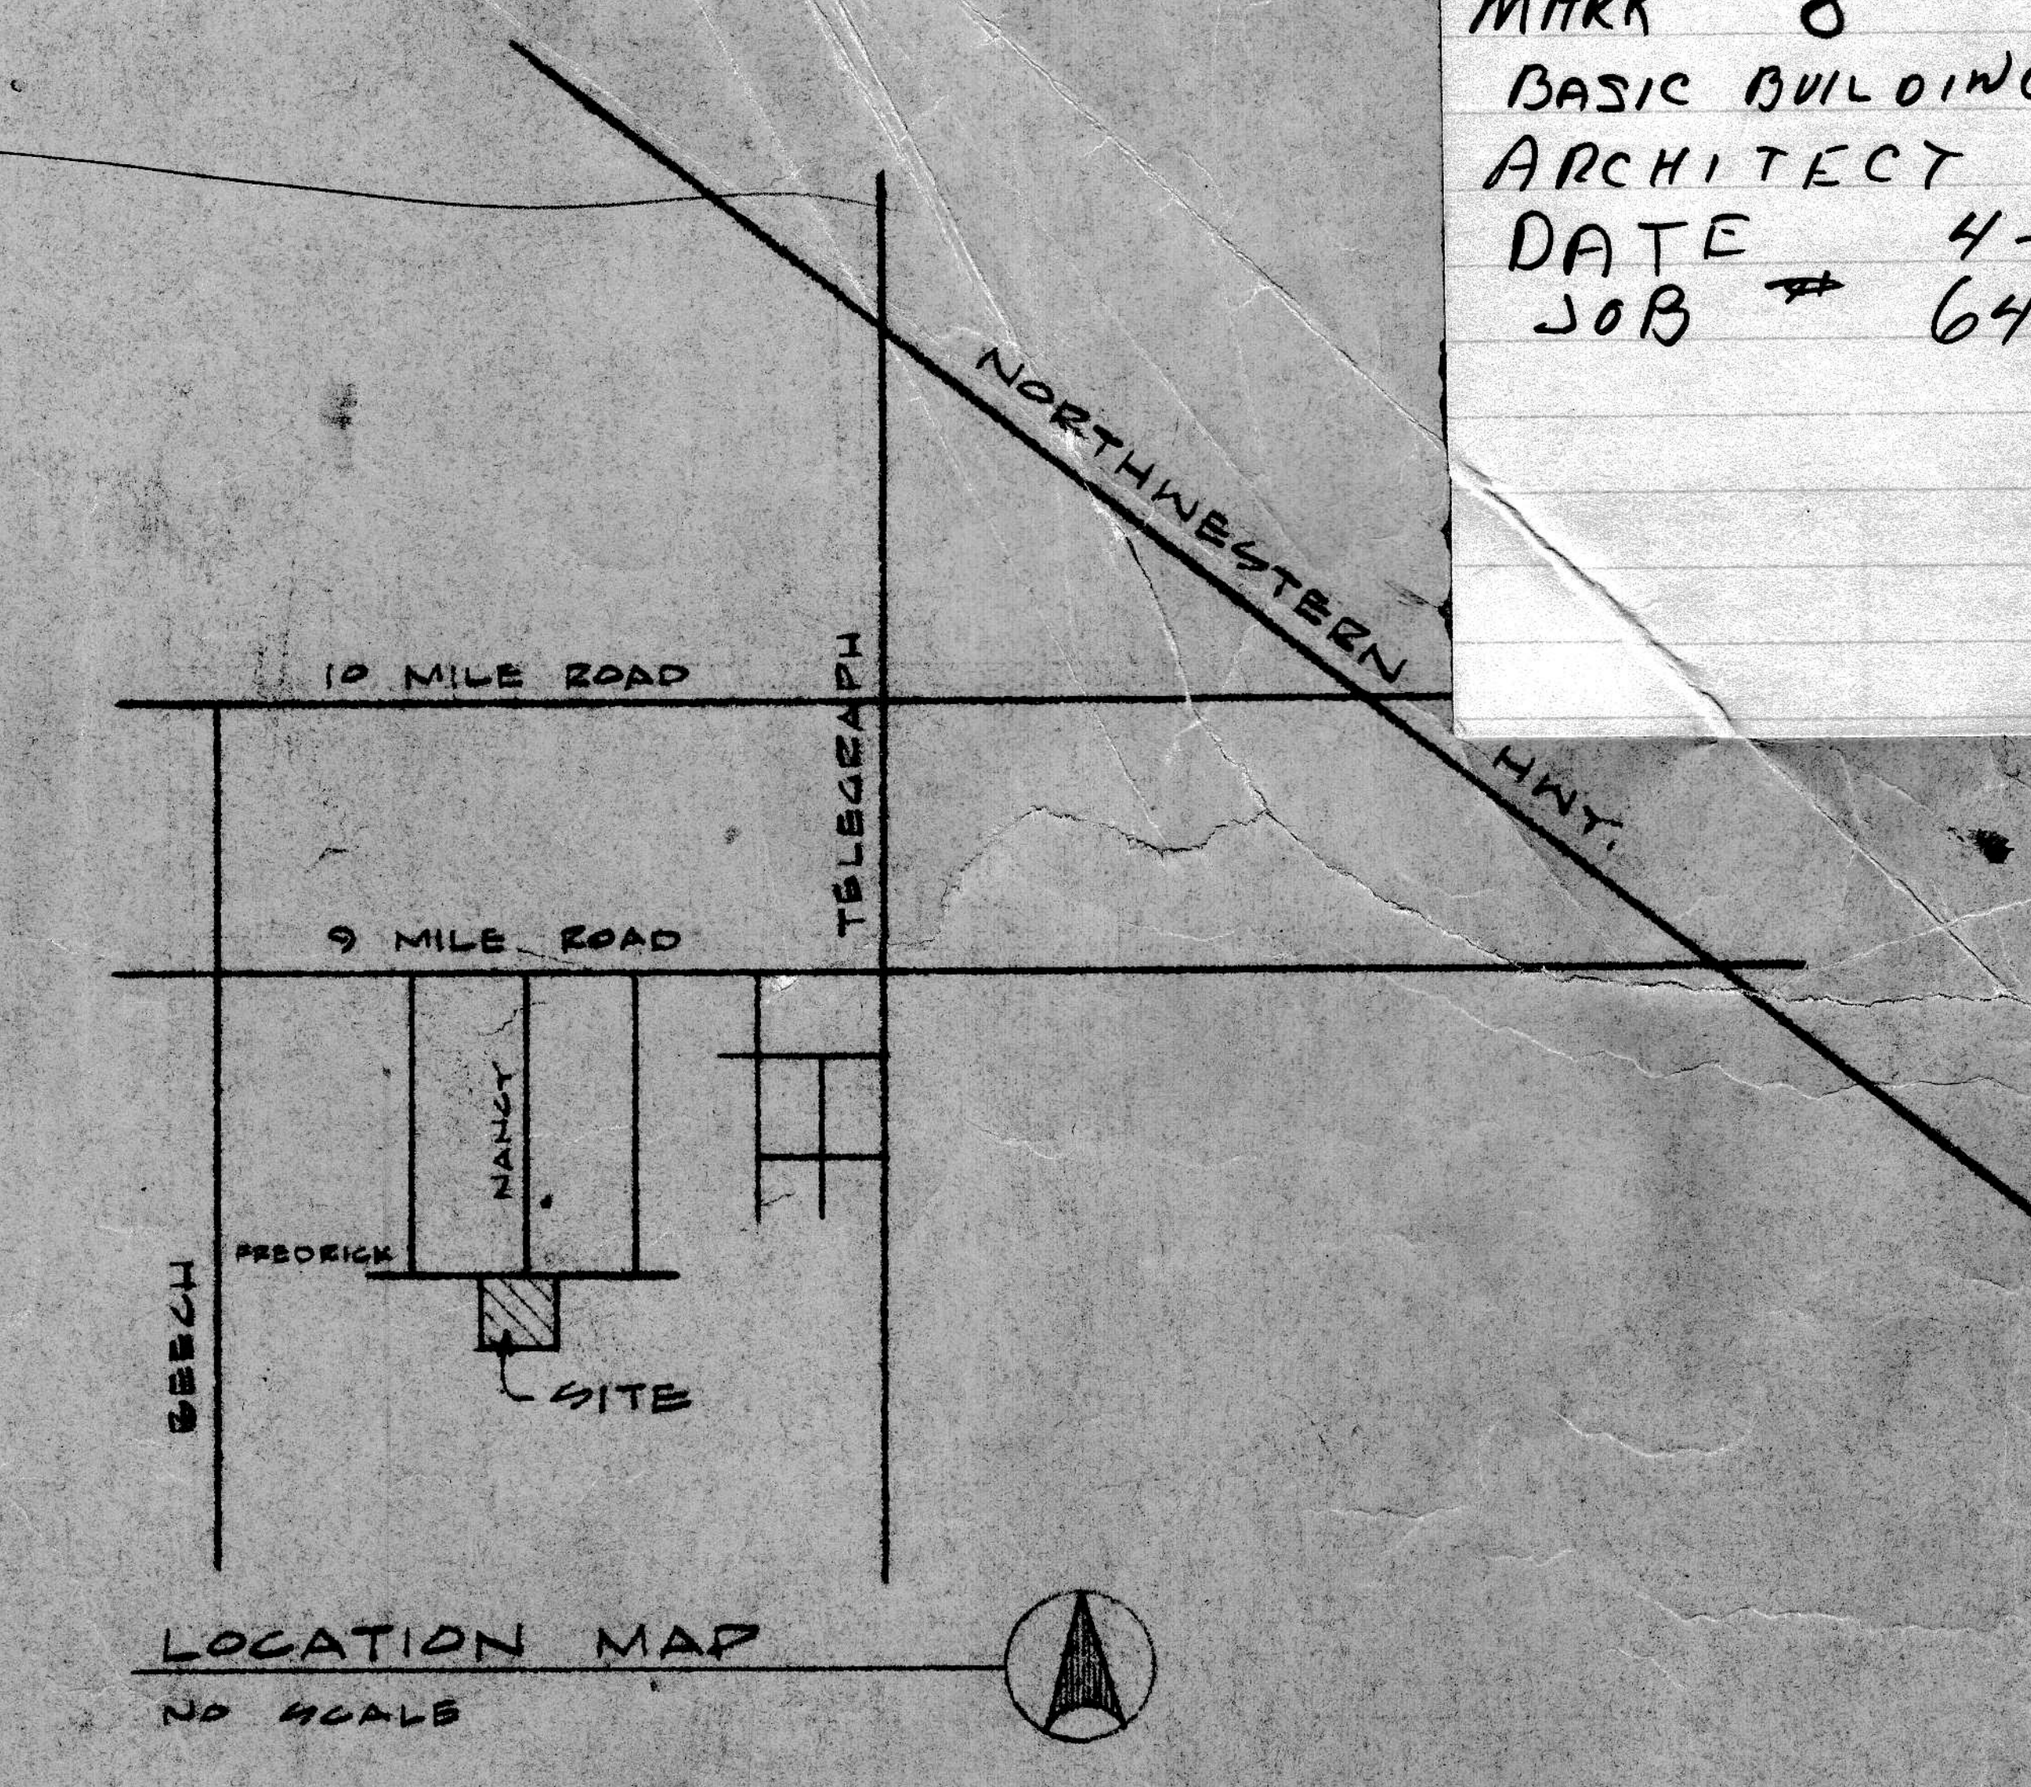

LOCATION MAP
NO SCALE

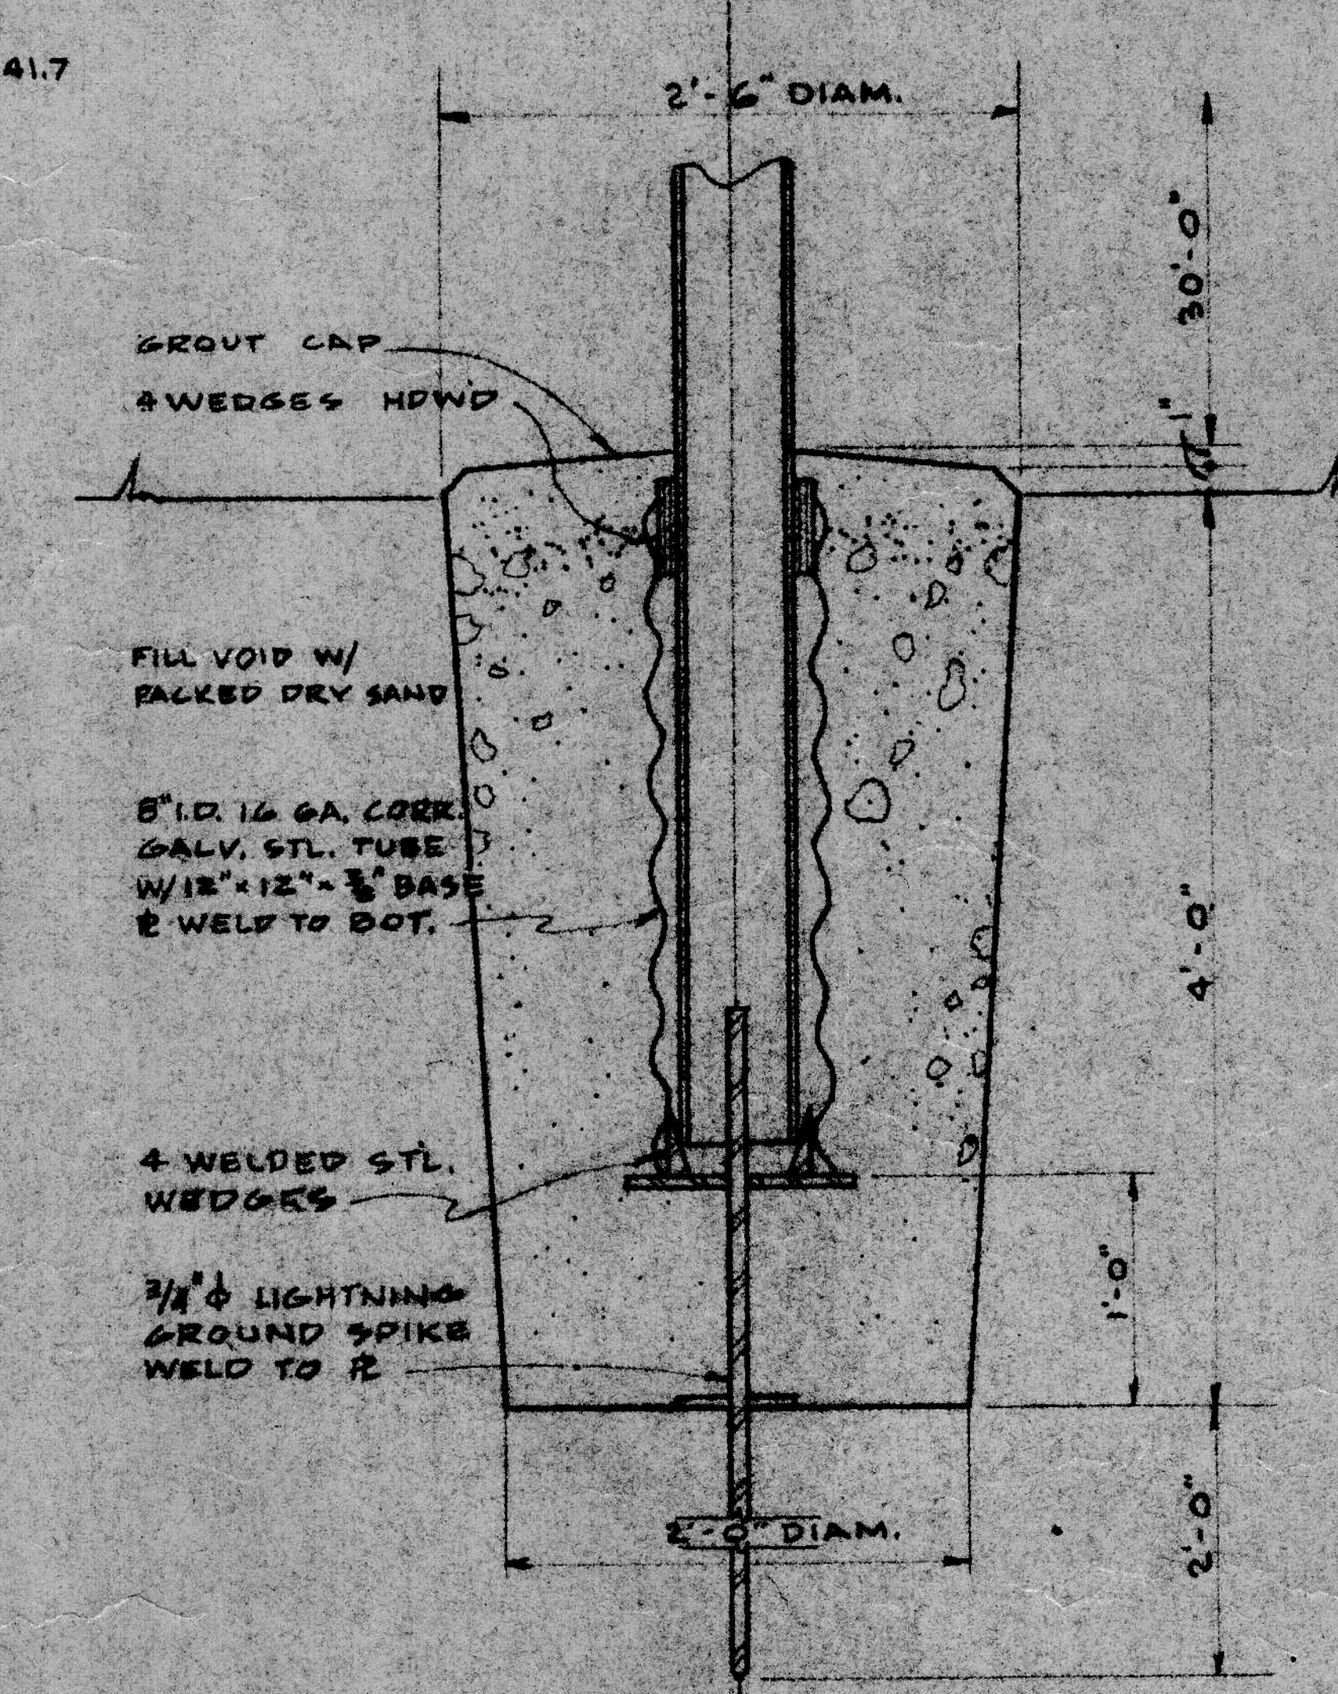

FLAGPOLE FOUNDATION SCALE 3/4" = 1'-0"

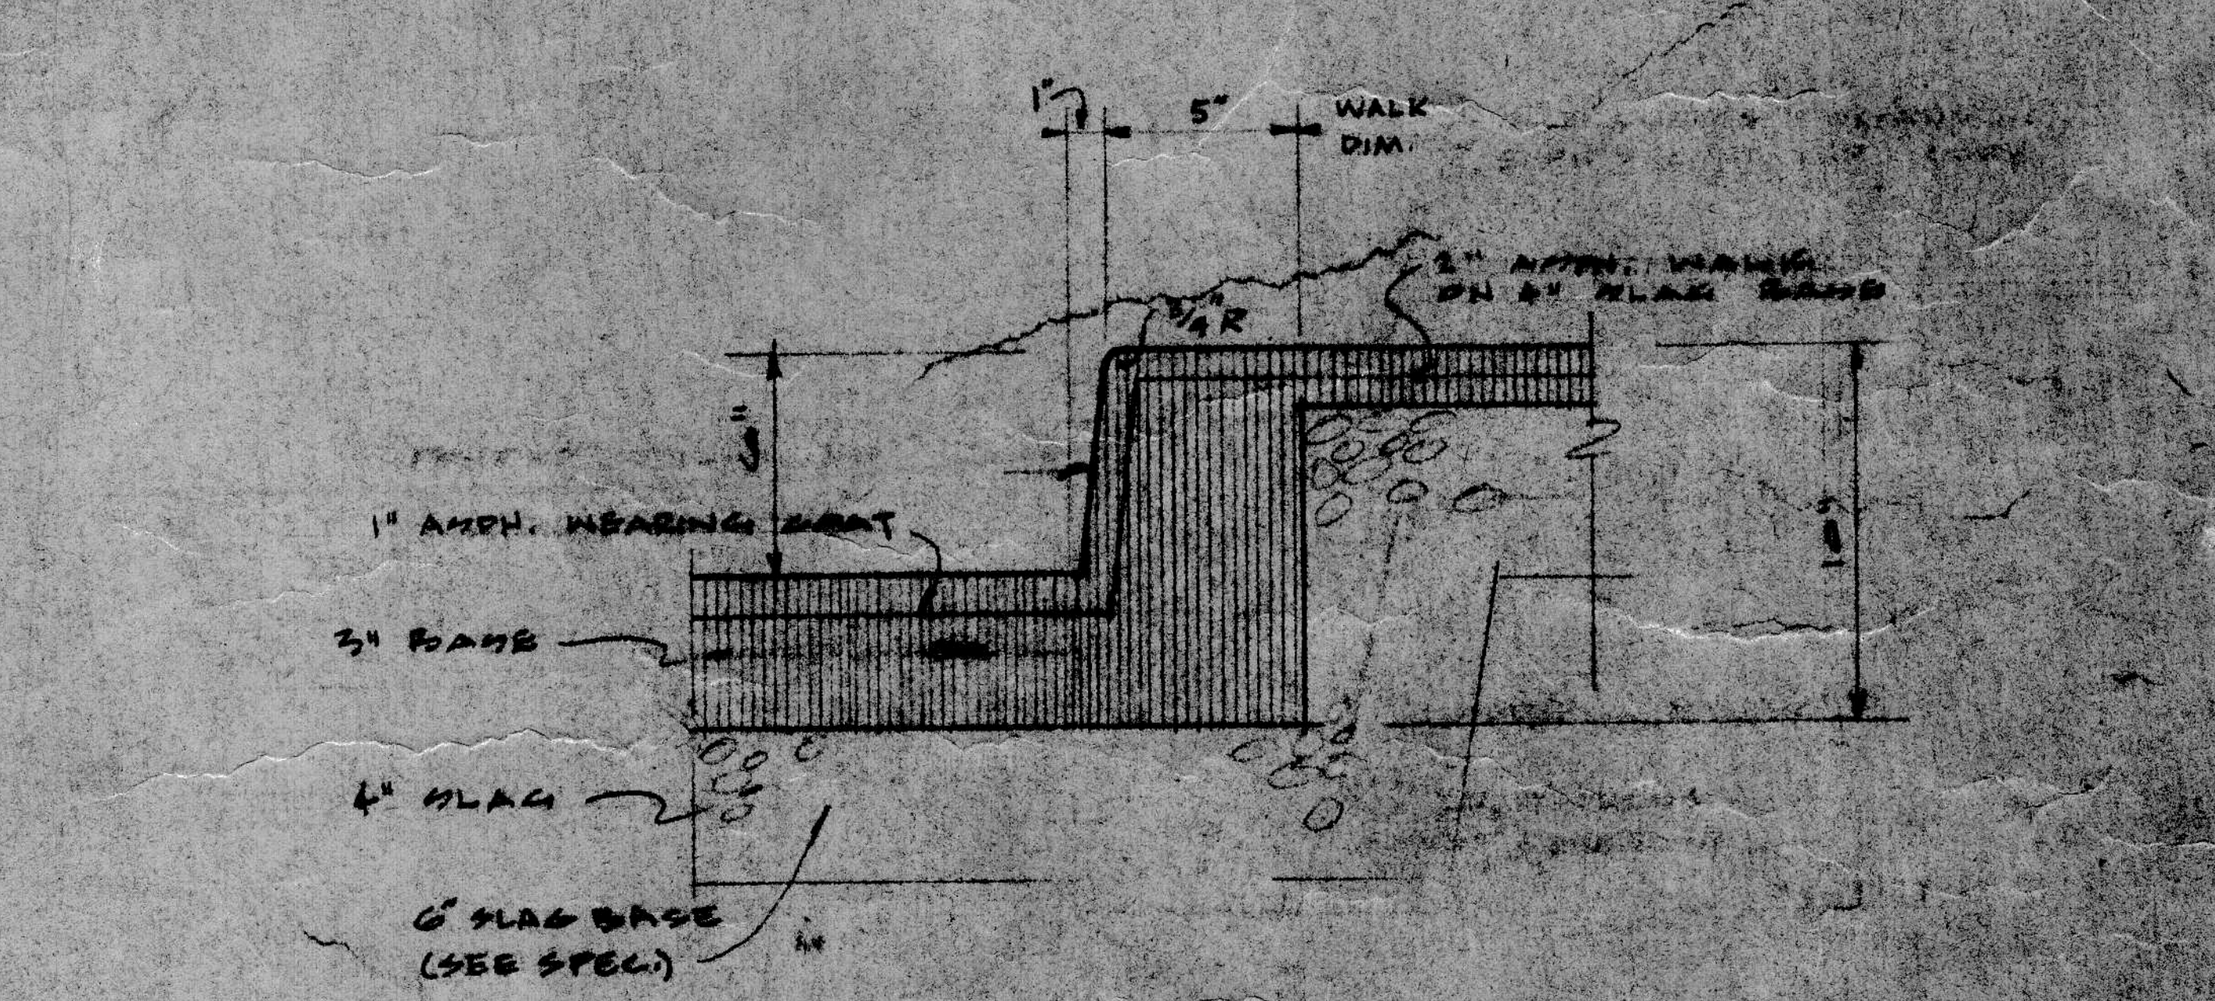

TYP. ASPH. CURB SCALE 1 1/2" = 1'-0"

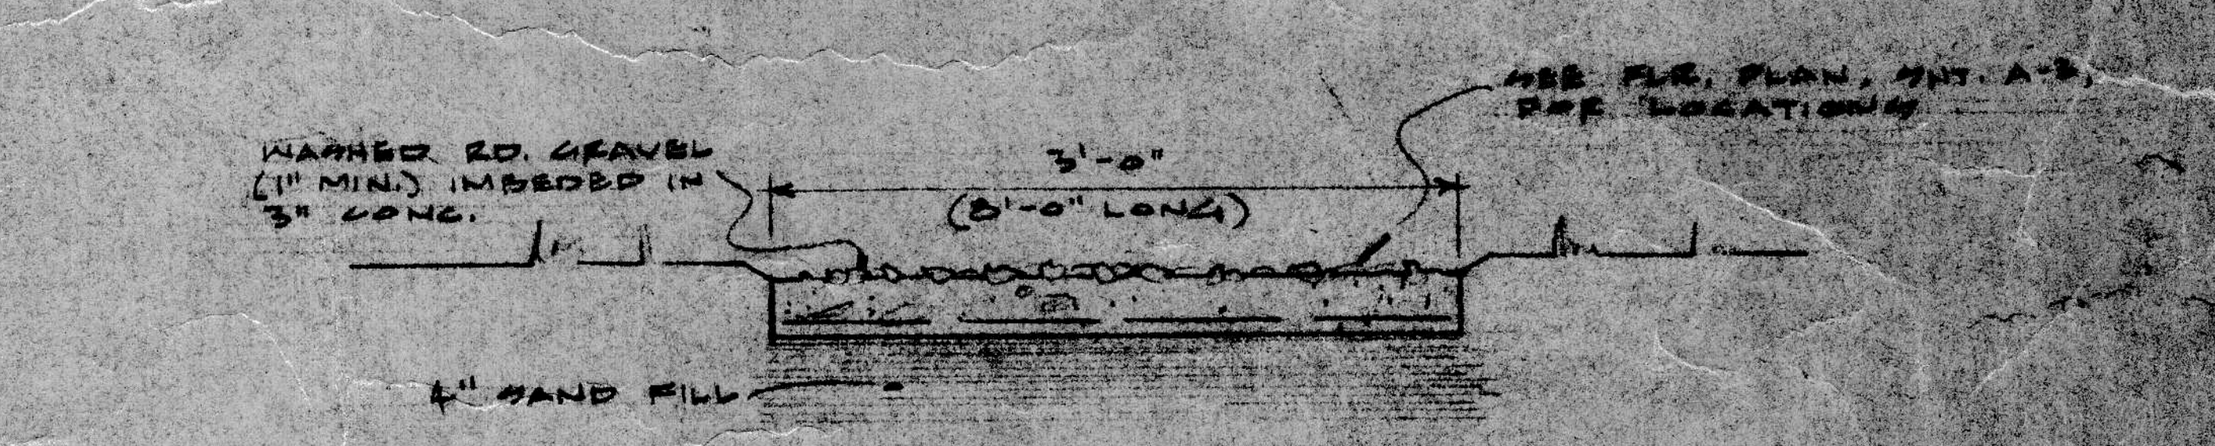

SPLASH PAD DETAIL
SCALE 3/4" = 1'-0"

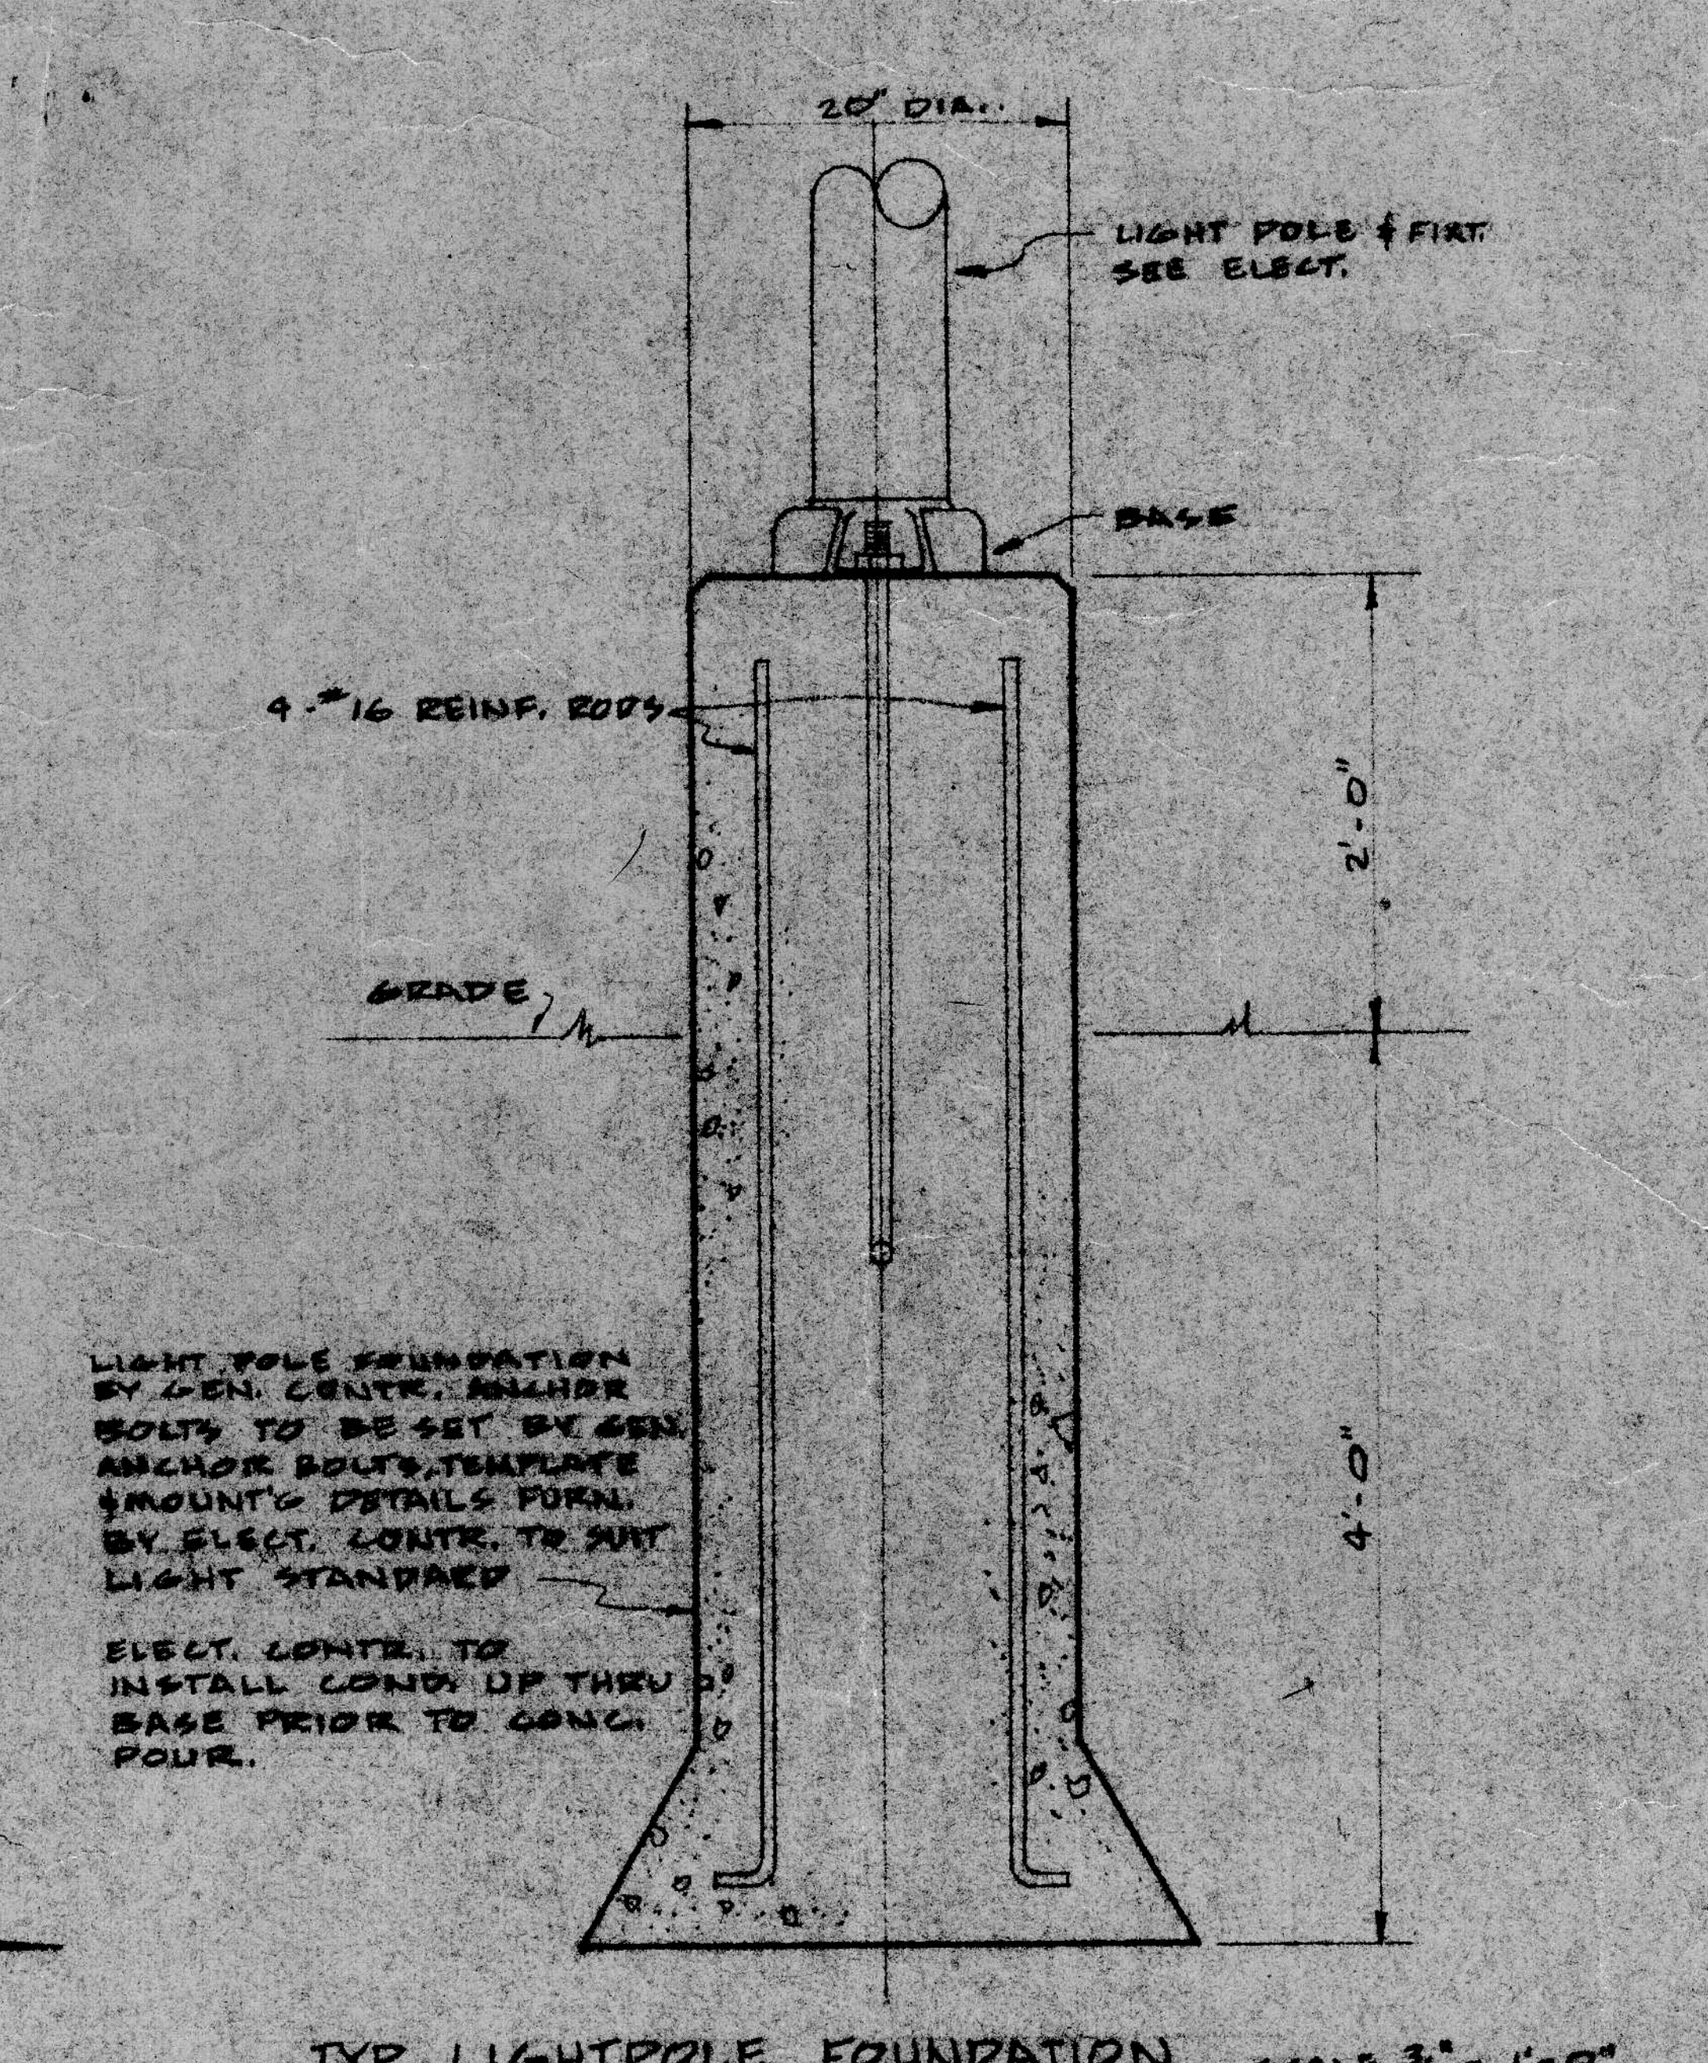

LIGHT POLE FOUNDATION BY GEN. CONTR. ANCHOR BOLTS TO BE SET BY GEN. ANCHOR BOLTS, TEMPLATE & MOUNT'G DETAILS FURN. BY ELECT. CONTR. TO SUIT LIGHT STANDARD

ELECT. CONTR. TO INSTALL COND. UP THRU BASE PRIOR TO CONC. POUR.

TYP. LIGHTPOLE FOUNDATION SCALE 3/4" = 1'-0"

SITE WORK NOTES

1. TEMPORARY FENCE: GEN. CONTR. PROVIDE MIN. 5'-0" HIGH TEMPORARY FENCE AROUND CONTRACT LIMIT LINES UNTIL PROJECT COMPLETION.
2. VERIFY LOCATION OF ALL EXIST. UTILITIES & UNDERGROUND WORK PRIOR TO EXCAVATING.
3. PROVIDE 22 CONC. PARKING BLKS (OPEN TYPE FOR DRAINAGE) VERIFY LOCATION W/ ARCHITECT.
4. ALL TREE REMOVAL BY OWNER.
5. CONTRACT LIMITS:
   - NORTH : NORTH PROPERTY LINE
   - SOUTH : AS SHOWN
   - EAST : AS SHOWN
   - WEST : WEST PROPERTY LINE
6. TEMPORARY ROADWAY SHOWN SHADED SHALL BE INSTALLED IMMEDIATELY AFTER AWARD OF CONTRACT. CUT GRADE TO SOLID BEARING AS REQUIRED FOR THE 6IN. PAVING AND INSTALL A MIN. OF 4" 21-A SLAG. MAINTAIN BASE AS REQUIRED TO PERMIT CONTINUOUS UNOBSTRUCTED OPERATION.
7. FINISH GRADING SHALL BE DONE W/CONTINUOUS GRADUAL SLOPES INTO EXISTING GRADES OR TO WALKS ETC. USE 3% MIN. SLOPE INTO EXISTING GRADES FOR MIN. DIST. OF 20'-0" FROM NEW CONSTR. UNLESS OTHERWISE SHOWN.

MAY 22 1968
JOSEPH ST. CYR, ARCHITECT AND ASSOCIATES

SOUTHFIELD ELEMENTARY SCHOOL - SECTION 32
SOUTHFIELD MICHIGAN

SITE PLAN
EXTERIOR DETAILS

JOSEPH ST. CYR ARCHITECT AND ASSOCIATES, INC.
THE PROFESSIONAL VILLAGE
FARMINGTON ROAD LIVONIA, MICHIGAN GARFIELD 7-3310

REVISIONS

DATE 4-5-65
DRAWN
CHECKED
FILE 6421

A-1